



KOHLER®

KD Series

| Air Cooled Diesel Engines

2.7 – 8.8 kW | 3.7 – 12.0 hp

Single Cylinder Air-cooled Diesel Engines

Standard equipment

RECOIL STARTING WITH
AUTOMATIC COMPRESSION
RELEASE

FUEL TANK

FUEL FILTER

DRY AIR CLEANER

MUFFLER WITH GUARD

ACCELERATOR AND STOP
MANUAL CONTROL

AUTOMATIC DEAERATION ON
INJECTION PUMP

WIRE MESH OIL FILTER

CONICAL POWER TAKE-OFF
EXTERNAL SAFETY FUEL
FILTER

AUTOMATIC FUEL CONTROL
DURING START

USER MAINTENANCE AND SPARE
PARTS BOOKLET

SPECIFIC FOR KD15-440 MODEL:

HYDRAULIC TAPPETS

HIGH CAPACITY DRY AIR

CLEANER

FUEL TANK DRAIN TAP

3 YEARS WARRANTY



Single Cylinder Air-cooled Diesel Engines

Accessories on demand

POWER TAKE-OFF FLYWHEEL SIDE (ENGINES WITH ELECTRICAL STARTING)	OIL BATH AIR CLEANER
POWER TAKE-OFFS WITH FLANGING AND SPECIAL SHAFT	CYLINDER HEAD TEMPERATURE SWITCH
LATERAL POWER TAKE-OFF*	GLOW PLUG ON INTAKE MANIFOLD STOP WITH SOLENOID VALVE RECOIL WITH DENOISING COVER
INTERNAL DYNAMIC BALANCER	GRASS PROTECTION FOR ENGINE COOLING
ELECTRIC START 12V / 24 V	ALTERNATOR WITH VOLTAGE REGULATOR 12 V OR 24 V
KEYSWITCH PANEL FUEL LIFT PUMP	OIL LEVEL SENSOR SWITCH
EMERGENCY STOP THROUGH ELECTROVALVE	HIGH CAPACITY OIL SUMP (KD15-350 AND KD15-440)
ACCELERATOR AND STOP REMOTE CONTROL	HIGH CAPACITY OIL AND FUEL FILTERS FOR REMOTE ASSEMBLY*
OIL PRESSURE SWITCH	SINGLE LEVER CONTROL
OIL TEMPERATURE SWITCH	CONTROL LEVER GUARD

SPECIFIC FOR KD15-440 MODEL:

- IN-TANK FUEL PRE-FILTER
- CYCLONIC AIR INTAKE PRE-FILTER
- AIR FILTER CLOGGING INDICATOR,
INTEGRATED INTO THE ENGINE
- EXTERNAL SPIN ON OIL FILTER

*On KD15-350 and KD15-440




KD15 225



Data

Dimensions (mm)

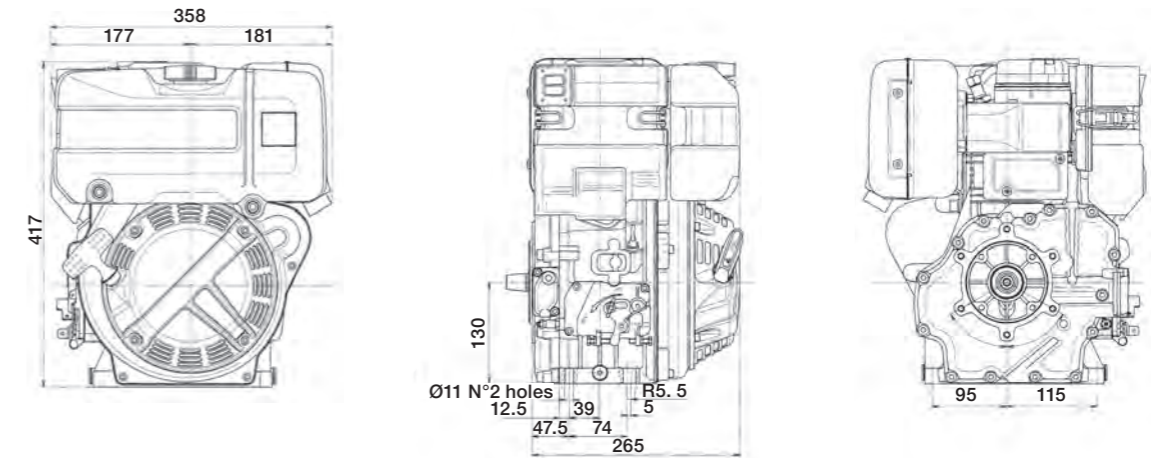


QUICK SPECIFICATIONS	KD15 225
CYLINDERS	1
MAX POWER kW (HP) @ rpm	3.5 (4.7) @ 3600
MAX TORQUE Nm @ rpm	10.4 @ 2400

Performance curves

(ACCORDING TO ISO 14396)

KD15 225

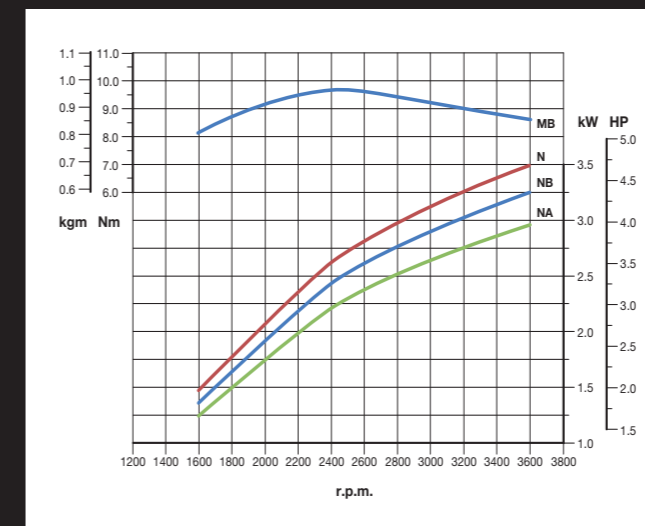

- N - Power curve - 80/1269/CE E-ISO 1585
- NB - Power curve
- NA - Power curve
- MB - Torque curve - (NB curve)

Performances measured according to ISO 14396 without final intake and exhaust line. Actual engine performances may be affected by accessories (intake and exhaust line, charging, cooling fan, etc.), application, ambient operating conditions (temperature, humidity, and altitude) and other factors.




(Power & torque N curve - 80/1269/CE E-ISO 1585)

KD15 350



Data

Dimensions (mm)

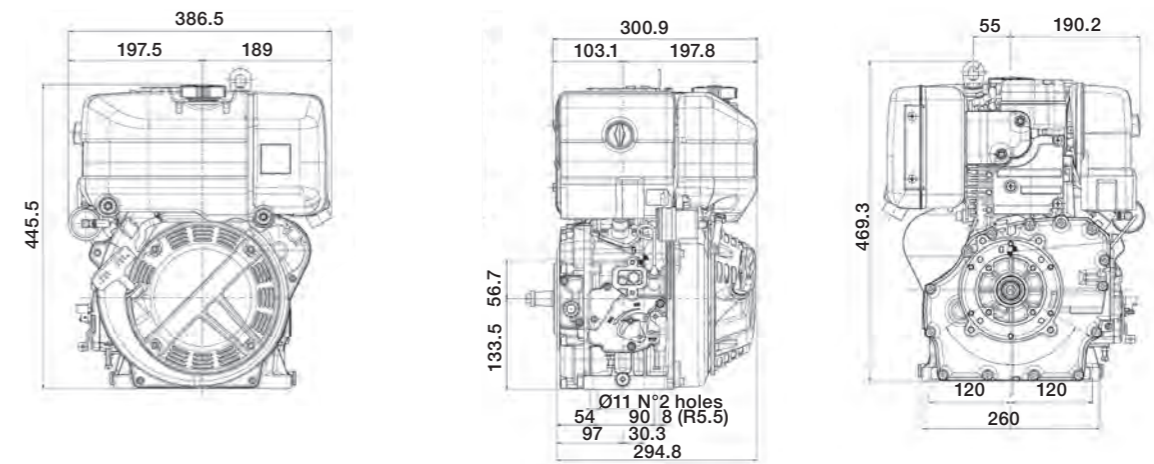


QUICK SPECIFICATIONS	KD15-350 NE36	KD15-350 U436	KD15-350 E536
CYLINDERS	1	1	1
MAX POWER kW (HP) @ rpm	5.1 (6.8) @ 3600	5.0 (6.7) @ 3600	5.5 (7.4) @ 3600
MAX TORQUE Nm @ rpm	15.3 @ 2400	14.6 @ 2500	16.0 @ 2500
EMISSION COMPLIANCE	-	US TIER 4 FINAL	EU STAGE V
OPERATING SPEED	VARIABLE SPEED	SINGLE SPEED	VARIABLE SPEED


Performance curves

(ACCORDING TO ISO 14396)

KD15-350 NE36

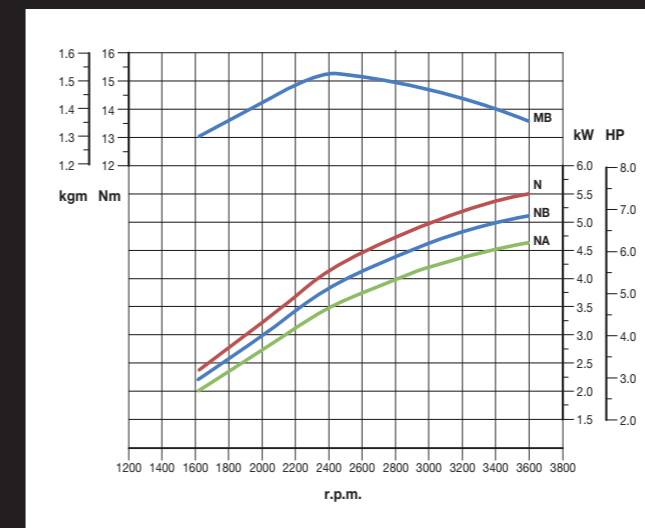

KD15-350 E536

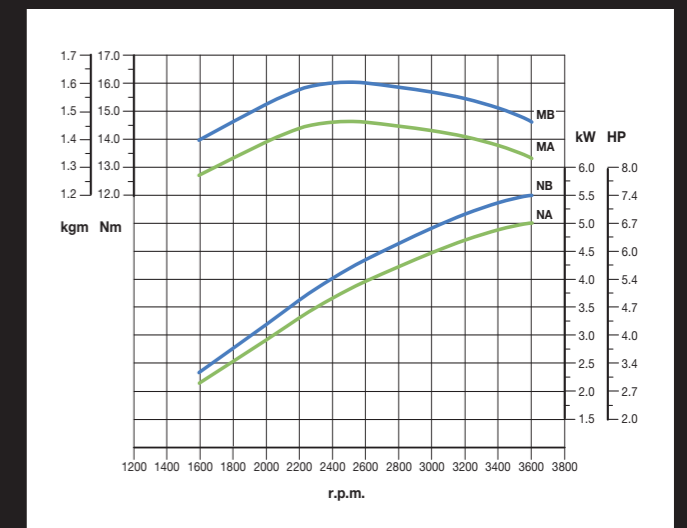

- N - Power curve - 80/1269/CE E-ISO 1585
- NB - Power curve
- NA - Power curve
- MB - Torque curve - (NB curve)
- MA - Torque curve - (NA curve)

Performances measured according to ISO 14396 without final intake and exhaust line. Actual engine performances may be affected by accessories (intake and exhaust line, charging, cooling fan, etc.), application, ambient operating conditions (temperature, humidity, and altitude) and other factors.




(Power & torque NB curve - ISO 3046/1 - IFN)

KD15 440



Data

Dimensions (mm)

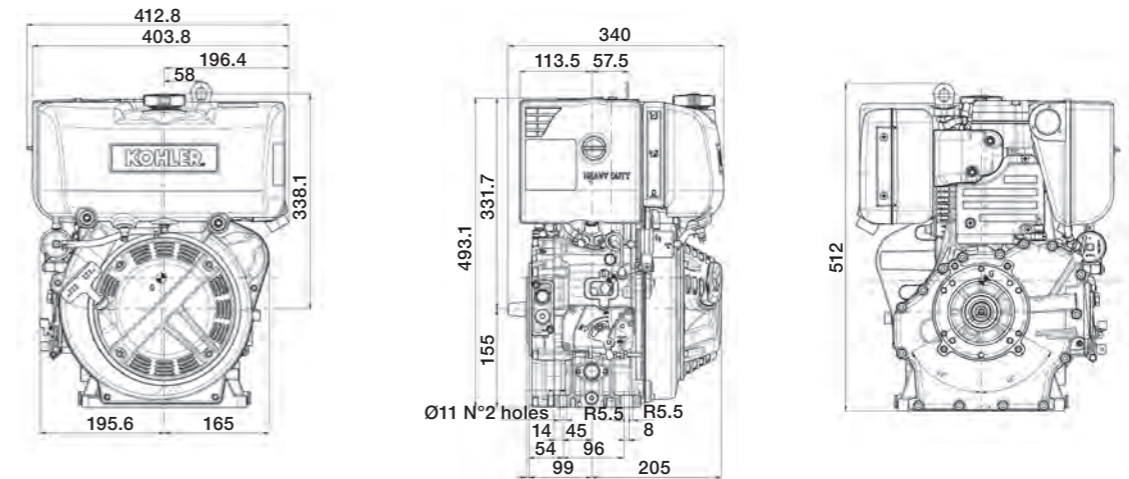


QUICK SPECIFICATIONS	KD15-440 NE36	KD15-440 U436	KD15-440 E536
CYLINDERS	1	1	1
MAX POWER kW (HP) @ rpm	7.5 (10.1) @ 3600	7.0 (9.4) @ 3600	7.5 (10.1) @ 3600
MAX TORQUE Nm @ rpm	23 @ 2200	23 @ 2200	24.5 @ 2200
EMISSION COMPLIANCE	-	US TIER 4 FINAL	EU STAGE V
OPERATING SPEED	VARIABLE SPEED	SINGLE SPEED	VARIABLE SPEED


Performance curves

(ACCORDING TO ISO 14396)

KD15-440 NE36

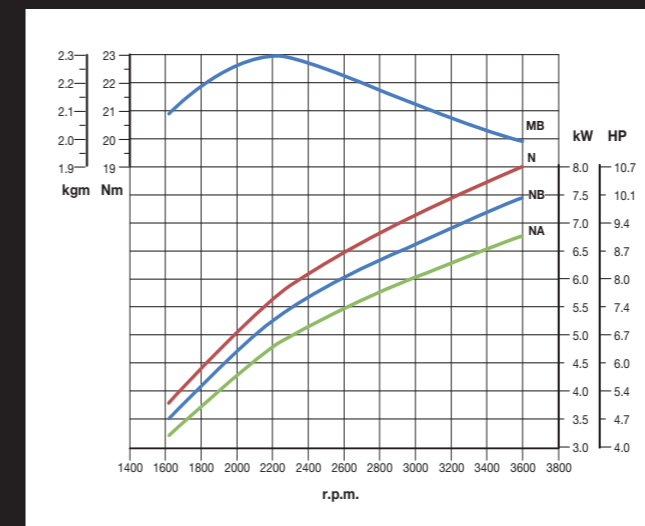

KD15-440 E536

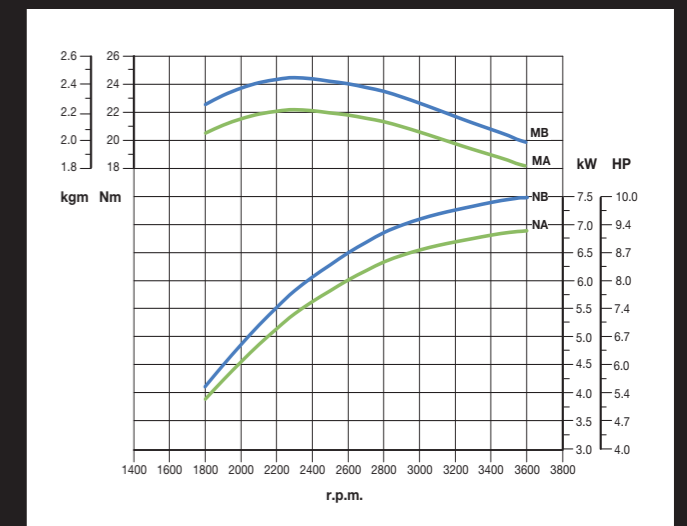


- N - Power curve - 80/1269/CE E-ISO 1585
- NB - Power curve
- NA - Power curve
- MB - Torque curve - (NB curve)
- MA - Torque curve - (NA curve)

Power ratings refer to engines equipped with air filter, standard muffler, after running-in period at ambient conditions of +25°C, relative humidity 30% and 1 bar. Power levels drop by 1% every 100 m altitude and by 2% every 5°C above +25°C.



(Power & torque NB curve - ISO 3046/1 - IFN)

Application specs

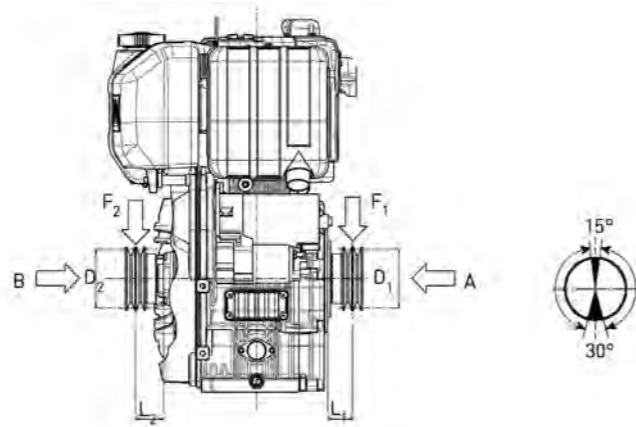

KD15-225

Minimum pulley diameters for belt drive

$$D_2 \text{ (mm)} \geq 740 [90 + L_2 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

$$D_1 \text{ (mm)} \geq 820 [55 + L_1 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

Max intermittent axial load in both directions A - B = 150 kg

Max radial force on pulley for belt drive

$$F_2 \text{ (N)} \leq \frac{77000}{90 + L_2 \text{ (mm)}}$$

$$F_1 \text{ (N)} \leq \frac{70000}{55 + L_1 \text{ (mm)}}$$

KD15-350

Minimum pulley diameters for belt drive

$$D_2 \text{ (mm)} \geq 860 [60 + L_2 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

$$D_1 \text{ (mm)} \geq 820 [55 + L_1 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

Max intermittent axial load in both directions A - B = 200 kg

Max radial force on pulley for belt drive

$$F_2 \text{ (N)} \leq \frac{67000}{60 + L_2 \text{ (mm)}}$$

$$F_1 \text{ (N)} \leq \frac{70000}{55 + L_1 \text{ (mm)}}$$

KD15-440

Minimum pulley diameters for belt drive

$$D_2 \text{ (mm)} \geq 620 [66 + L_2 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

$$D_1 \text{ (mm)} \geq 650 [53 + L_1 \text{ (mm)}] \frac{N \text{ (kW)}}{n \text{ (rpm)}}$$

Max intermittent axial load in both directions A - B = 2000 N Max

Max radial force on pulley for belt drive

$$F_1 \text{ (N)} \leq \frac{89000}{53 + L_1 \text{ (mm)}}$$


$$F_2 \text{ (N)} \leq \frac{92000}{66 + L_2 \text{ (mm)}}$$

Available Flanges*

	FLANGE STANDARD - KD15-225 AND KD15-350	INDUSTRIAL VERSION	
STANDARD VERSION - KD15-225 AND KD15-350			
		FLANGE TYPE A - KD15-225	GENSET VERSION
KD15-225			
		FLANGE TYPE B - KD15-350	GENSET VERSION
KD15-350			

*Other flanges available on request

Available Flanges*

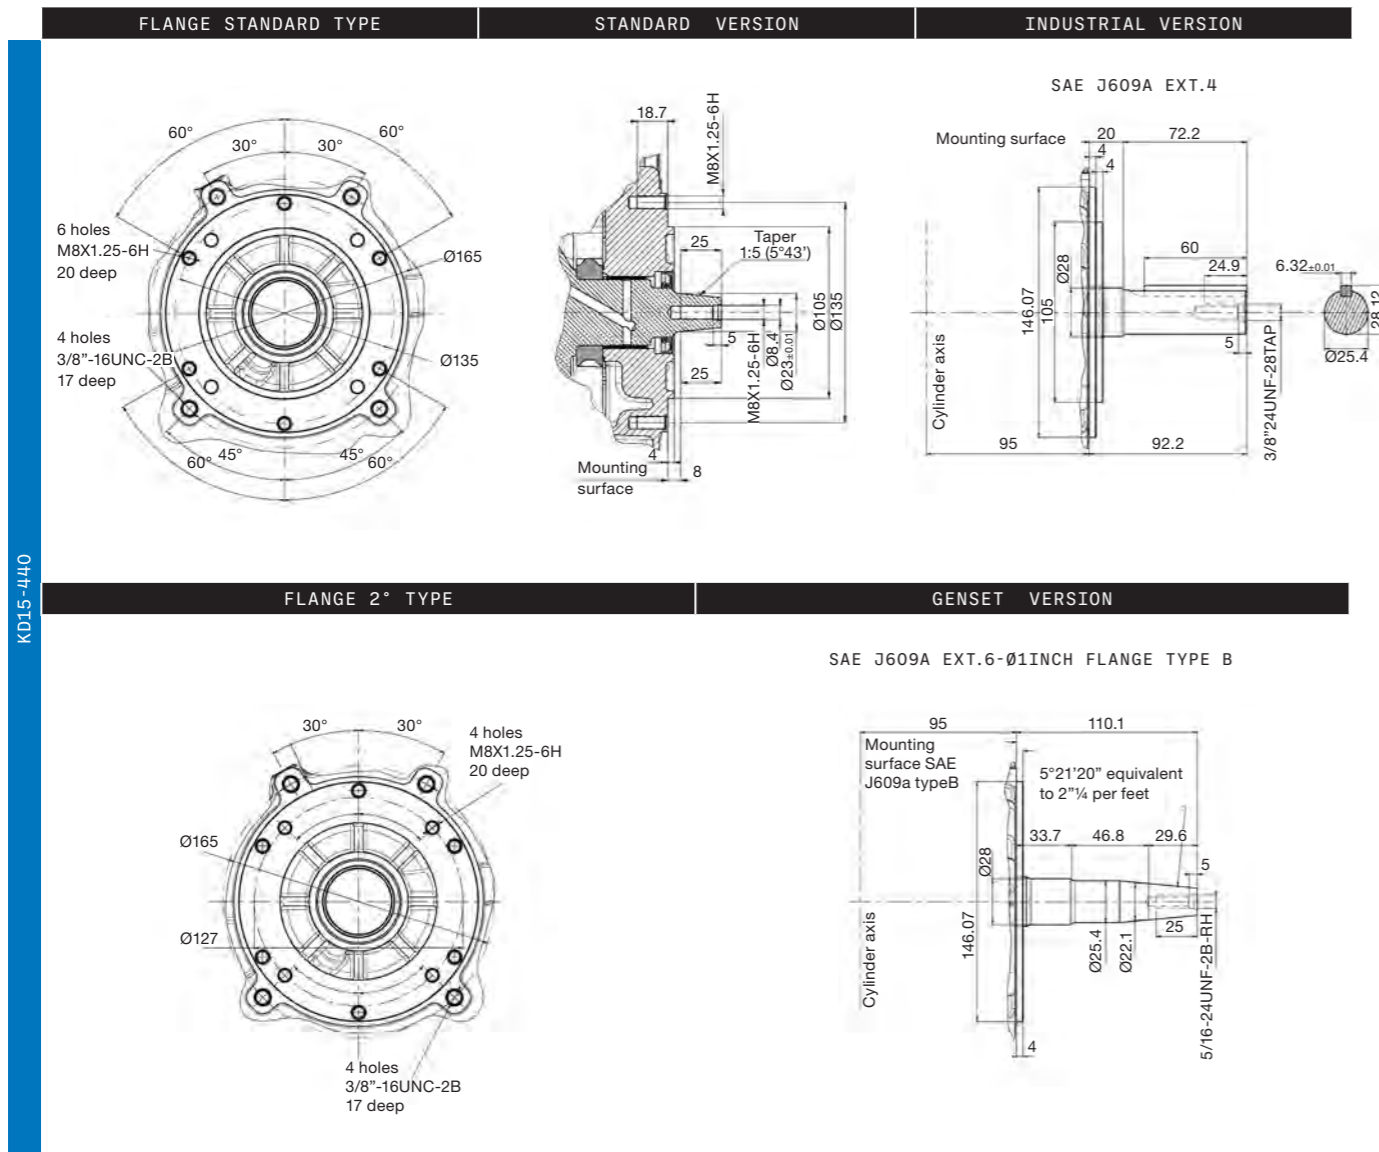

KD15-440

*Other flanges available on request

Technical Specifications

MODEL	KD15-225	KD15-350			
ENGINE SPECS	4 STROKE AIR COOLED DIESEL ENGINE	•	•		
CONICAL POWER TAKE-OFF ON CRANKSHAFT	•	•			
ANTICLOCKWISE ROTATION	•	•			
FORCED LUBRICATION WITH OIL PUMP	•	•			
CENTRIFUGAL MASS GOVERNOR	•	•			
BUILT-IN FULL FLOW OIL FILTER	•	•			
OIL BREATHING BLOW-BY WITH SAFETY DEVICE	•	•			
AUTOMATIC EXTRA FUEL STARTING DEVICE	•	•			
SELF BLEEDING FUEL SYSTEM	•	•			
TORQUE ADJUSTER	•	•			
AUTOMATIC COMPRESSION RELEASE	•	•			
DIE-CAST ALUMINUM CRANKCASE WITH INTEGRAL CAST IRON CYLINDER LINER	•	•			
RE-BORABLE INDEPENDENT CAST IRON CYLINDERS	-	-			
ALUMINUM CYLINDER HEAD	•	•			
BUILT-IN RIGID FEET	•	•			
HYDRAULIC TAPPETS	-	-			
TECHNICAL FEATURES	CYLINDER	1	1		
BORE (mm)	69	82			
STROKE (mm)	60	66			
ENGINE DISPL (cm³)	224	349			
INJECTION SYSTEM	DI	DI			
COMPRESSION RATIO	21:1	20.3:1			
PERFORMANCE	EMISSION COMPLIANCE	ECE R 24	ECE R 24	US TIER 4 F	EU STAGE V
RATING (kW/HP)	(3600 rpm)	(3600 rpm)	(3600 rpm)	(3600 rpm)	(3600 rpm)
N (80/1269/CEE) ISO 1585	3.5 / 4.8	5.5 / 7.4	-	-	-
NB	3.3 / 4.5	5.1 / 6.8	5.0 / 6.7	5.5 / 7.4	-
NA	3.1 / 4.2	4.7 / 6.2	-	-	-
MAX TORQUE (Nm @ rpm)	10.4 @ 2400	15.3 @ 2400	14.6 @ 2500	16.0 @ 2500	
MIN IDLING SPEED	950 + 1000	950 + 1000			
FUEL COMPATIBILITY	EN 590	•	•		
NO 1 DIESEL (US) - ASTM D 975-09 B-GRADE 1-D S 15	•	•			
NO 1 DIESEL (US) - ASTM D 975-09 B-GRADE 1-D S 500	•	•			
NO 2 DIESEL (US) - ASTM D 975-09 B-GRADE 2-D S 15	•	•			
NO 2 DIESEL (US) - ASTM D 975-09 B-GRADE 2-D S 500	•	•			
ARCTIC EN 590/ASTM D 975-09 B	•	•			
HIGH SULFUR FUEL < 5000 PPM (< 0.5%)	•	•			
HIGH SULFUR FUEL > 5000 PPM (> 0.5%)	•	•			
MILITARY NATO FUELS F34-F35-F44-F63-F64-F65*	•	•			
MILITARY US FUELS JP5-JP8 (AVTUR)*	•	•			
CIVIL JET FUELS JET A/A1*	•	•			
HVO - HYDROTREATED VEGETABLE OIL	•	•			
SERVICE FEATURES	FUEL TANK CAPACITY (l)	3	4.3		
OIL SUMP CAPACITY (l)	0.9	1.2			
OIL CONSUMPTION (kg/h)	0.0021	0.0032			
OIL CHANGE INTERVAL STD/SYNTHETIC (hr)	250**	250**			
OIL FILTER CHANGE INTERVAL STD/SYNTHETIC (hr)	500	500			
DRY AIR CLEANER CHANGE INTERVAL (hr)	250	250			
VALVE ADJUSTEMENT	500	500			
PHYSICAL CHARACTERISTICS	H x L x W (FAN EXCLUDED) (mm)	417 x 358 x 265	445.5 x 386.5 x 300.9		
DRY WEIGHT (kg)	28	33			
DAILY SERVICE POINTS - POSITIONS	1 SIDE SERVICE	1 SIDE SERVICE			
AMBIENT OPERATING TEMPS (°C)	-10 TO +50	-10 TO +50			
GRADEABILITY-ALL ROUND (INTERMITTENT-30MIN)(DEG)	25°	25°			
GRADEABILITY-ALL ROUND (PEAK VALUE-1 MIN)(DEG)	35°	35°			
CAP. OF AIR REQUIRED FOR CORRECT COMBUSTION @ 3600 (l/min)	350	540			
CAP. OF AIR REQUIRED FOR CORRECT COOLING @ 3600 (l/min)	3800	5000			
LUBRICATION	OIL TYPE	SAE 5W 40 / API CF4	SAE 5W 40 / API CF4		

For more information, contact your KOHLER source of supply.
Kohler Co. reserves the right to make modifications without prior notice.

KOHLER®

Printed in Italy

ED0035584830

Rev.12 01/24 EN

KOHLER CO.

kohlerengines.com